


# エスパガードX 寸法一覧表 【 2リング 】

孔径	リング筋径	A (mm)	B (mm)	C (mm)	連結筋径	重量 kg/枚
φ100	F 6	323	363	186	D 6	0.49
	F 8	340	382	192	D 6	0.79
	F 10	359	404	200	D 6	1.21
	F 13	385	428	212	D 6	2.30
	F 16	404	447	220	D 10	3.78
φ125	F 6	359	400	212	D 6	0.54
	F 8	377	419	218	D 6	0.88
	F 10	395	440	226	D 6	1.33
	F 13	422	465	238	D 6	2.52
	F 16	441	484	246	D 10	4.12
φ150	F 6	395	435	237	D 6	0.59
	F 8	412	454	243	D 6	0.96
	F 10	431	476	251	D 6	1.45
	F 13	458	500	263	D 6	2.73
	F 16	477	519	271	D 10	4.45
φ175	F 6	430	470	262	D 6	0.64
	F 8	448	489	268	D 6	1.04
	F 10	466	511	276	D 6	1.57
	F 13	493	536	288	D 6	2.93
	F 16	512	554	296	D 10	4.78
φ200	F 6	467	507	288	D 6	0.70
	F 8	484	526	294	D 6	1.13
	F 10	503	548	302	D 6	1.69
	F 13	530	572	314	D 6	3.15
	F 16	549	591	322	D 10	5.12
φ250	F 6	553	599	343	D 6	0.82
	F 8	568	618	349	D 6	1.32
	F 10	589	640	357	D 6	1.96
	F 13	613	664	369	D 6	3.63
	F 16	635	683	377	D 10	5.88
φ300	F 6	625	671	394	D 6	0.93
	F 8	640	690	400	D 6	1.48
	F 10	661	712	408	D 6	2.20
	F 13	686	736	420	D 6	4.06
	F 16	707	755	428	D 10	6.54
φ350	F 6	698	745	446	D 6	1.04
	F 8	714	764	452	D 6	1.65
	F 10	734	785	460	D 6	2.44
	F 13	759	810	472	D 6	4.50
	F 16	780	829	480	D 10	7.23
φ400	F 6	783	838	502	D 6	1.16
	F 8	801	857	508	D 6	1.85
	F 10	820	879	516	D 6	2.72
	F 13	846	903	528	D 6	4.98
	F 16	865	922	536	D 10	8.00
φ450	F 6	856	910	553	D 6	1.27
	F 8	873	929	559	D 6	2.01
	F 10	892	951	567	D 6	2.96
	F 13	918	975	579	D 6	5.41
	F 16	938	994	587	D 10	8.66
φ500	F 6	928	982	604	D 6	1.37
	F 8	945	1001	610	D 6	2.18
	F 10	964	1023	618	D 6	3.20
	F 13	991	1047	630	D 6	5.84
	F 16	1010	1066	638	D 10	9.34

孔径	リング筋径	A (mm)	B (mm)	C (mm)	連結筋径	重量 kg/枚
φ550	F 6	1000	1054	655	D 6	1.48
	F 8	1017	1073	661	D 6	2.35
	F 10	1036	1095	669	D 6	3.44
	F 13	1063	1120	681	D 6	6.27
	F 16	1082	1138	689	D 10	10.00
φ600	F 6	1088	1149	712	D 6	1.60
	F 8	1104	1168	718	D 6	2.54
	F 10	1125	1190	726	D 6	3.72
	F 13	1149	1214	738	D 6	6.77
	F 16	1170	1233	746	D 10	10.78
φ650	F 6	1159	1220	762	D 6	1.71
	F 8	1175	1239	768	D 6	2.71
	F 10	1195	1261	776	D 6	3.96
	F 13	1220	1285	788	D 6	7.18
	F 16	1241	1304	796	D 10	11.44
φ700	F 6	1230	1291	812	D 6	1.81
	F 8	1246	1310	818	D 6	2.87
	F 10	1266	1331	826	D 6	4.20
	F 13	1291	1356	838	D 6	7.61
	F 16	1312	1375	846	D 10	12.10
φ750	F 6	1301	1361	862	D 6	1.92
	F 8	1316	1380	868	D 6	3.03
	F 10	1337	1402	876	D 6	4.43
	F 13	1361	1426	888	D 6	8.02
	F 16	1383	1445	896	D 10	12.76

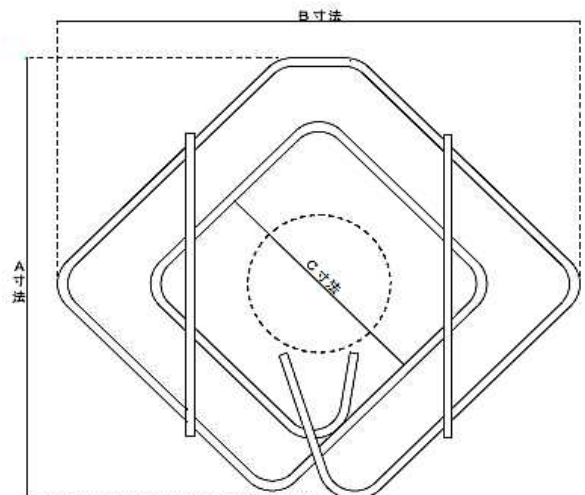

# エスパガードX 寸法一覧表 【 3リング 】

孔径	リング筋径	A (mm)	B (mm)	C (mm)	連結筋径	重量 kg/枚
φ100	F 6	335	380	186	D 6	0.75
	F 8	356	404	192	D 6	1.25
	F 10	379	432	200	D 6	1.91
	F 13	411	465	212	D 6	3.66
	F 16	436	492	220	D 10	6.07
φ125	F 6	371	417	212	D 6	0.84
	F 8	393	441	218	D 6	1.37
	F 10	415	469	226	D 6	2.09
	F 13	448	502	238	D 6	3.98
	F 16	473	529	246	D 10	6.57
φ150	F 6	407	452	237	D 6	0.91
	F 8	428	477	243	D 6	1.49
	F 10	451	504	251	D 6	2.26
	F 13	484	537	263	D 6	4.29
	F 16	509	564	271	D 10	7.05
φ175	F 6	442	487	262	D 6	0.99
	F 8	464	512	268	D 6	1.61
	F 10	486	539	276	D 6	2.44
	F 13	519	572	288	D 6	4.60
	F 16	544	600	296	D 10	7.54
φ200	F 6	479	524	288	D 6	1.07
	F 8	500	549	294	D 6	1.74
	F 10	523	576	302	D 6	2.62
	F 13	556	609	314	D 6	4.92
	F 16	581	636	322	D 10	8.04
φ250	F 6	565	616	343	D 6	1.25
	F 8	584	641	349	D 6	2.02
	F 10	609	668	357	D 6	3.02
	F 13	639	701	369	D 6	5.64
	F 16	667	728	377	D 10	9.17
φ300	F 6	637	688	394	D 6	1.41
	F 8	656	713	400	D 6	2.27
	F 10	681	740	408	D 6	3.38
	F 13	712	773	420	D 6	6.27
	F 16	739	800	428	D 10	10.16
φ350	F 6	710	762	446	D 6	1.57
	F 8	730	786	452	D 6	2.52
	F 10	754	814	460	D 6	3.74
	F 13	785	847	472	D 6	6.91
	F 16	812	874	480	D 10	11.17
φ400	F 6	795	855	502	D 6	1.75
	F 8	817	880	508	D 6	2.81
	F 10	840	907	516	D 6	4.15
	F 13	872	940	528	D 6	7.64
	F 16	897	967	536	D 10	12.31
φ450	F 6	868	927	553	D 6	1.91
	F 8	889	952	559	D 6	3.05
	F 10	912	979	567	D 6	4.51
	F 13	944	1012	579	D 6	8.27
	F 16	970	1039	587	D 10	13.30
φ500	F 6	940	999	604	D 6	2.07
	F 8	961	1024	610	D 6	3.30
	F 10	984	1051	618	D 6	4.86
	F 13	1017	1084	630	D 6	8.90
	F 16	1042	1112	638	D 10	14.29

孔径	リング筋径	A (mm)	B (mm)	C (mm)	連結筋径	重量 kg/枚
φ550	F 6	1012	1071	655	D 6	2.23
	F 8	1033	1096	661	D 6	3.54
	F 10	1056	1123	669	D 6	5.22
	F 13	1089	1156	681	D 6	9.53
	F 16	1114	1184	689	D 10	15.28
φ600	F 6	1100	1166	712	D 6	2.41
	F 8	1120	1191	718	D 6	3.84
	F 10	1145	1218	726	D 6	5.63
	F 13	1175	1251	738	D 6	10.28
	F 16	1202	1278	746	D 10	16.44
φ650	F 6	1171	1237	762	D 6	2.57
	F 8	1191	1261	768	D 6	4.08
	F 10	1215	1289	776	D 6	5.98
	F 13	1246	1322	788	D 6	10.89
	F 16	1273	1349	796	D 10	17.41
φ700	F 6	1242	1308	812	D 6	2.72
	F 8	1262	1332	818	D 6	4.32
	F 10	1286	1360	826	D 6	6.33
	F 13	1317	1393	838	D 6	11.51
	F 16	1344	1420	846	D 10	18.38
φ750	F 6	1313	1378	862	D 6	2.88
	F 8	1332	1403	868	D 6	4.56
	F 10	1357	1430	876	D 6	6.68
	F 13	1387	1463	888	D 6	12.13
	F 16	1415	1491	896	D 10	19.35

